


NuFlo products are produced with High Density Polyethylene Resin meeting the requirements of cell classification described in ASTM D3350. This specification complies with standards ASTM F667 and ASTM F2306. NuFlo products with gaskets shall meet the requirements of ASTM F477 and ASTM D3212.

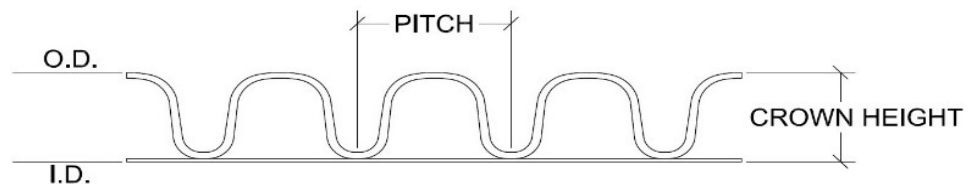

Physical Pipe Dimensions:

Nominal Diameter	I.D.	O.D.	Crown Height	Pitch	Weight / Foot
4"	3.99"	4.70"	.30"	.65"	.58 lb.
6"	5.99"	7.01"	.46"	.65"	.98 lb.
8"	8.10"	9.49"	.64"	.97"	1.42 lb.
10"	10.07"	11.79"	.73"	1.33"	2.54 lb.
12"	12.20"	14.44"	1.00"	1.73"	3.32 lb.
15"	15.03"	17.70"	1.20"	2.60"	4.19 lb.
18"	18.29"	21.50"	1.46"	2.60"	6.53 lb.
24"	23.86"	28.01"	1.81"	1.23"	10.69 lb.
30"	29.86"	34.75"	2.23"	3.00"	14.40 lb.
36"	35.91"	40.48"	2.26"	4.70"	18.55 lb.
42"	41.75"	47.27"	2.53"	4.70"	27.34 lb.
48"	47.96"	54.75"	2.82"	4.70"	31.00 lb.