


NuFlo products are produced with high density polyethylene (HDPE) resin meeting the requirements of cell classification described in ASTM D3350. This specification complies with AASHTO standards M252/M294 also including ASTM F667/F2306. NuFlo products with gaskets shall meet the requirements of ASTM F477 and ASTM D3212.



*Physical Pipe Dimensions:

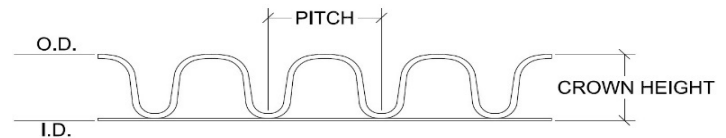

Nominal Diameter	I.D.	O.D.	Crown Height	Pitch	Weight / Foot
4"	4.04"	4.75"	.31"	.65"	.39 lb.
6"	5.95"	6.98"	.45"	.74"	.91 lb.
8"	8.05"	9.50"	.65"	1.04"	1.38 lb.
10"	9.95"	11.81"	.85"	1.30"	1.99 lb.
12"	12.20"	14.44"	1.00"	1.73"	3.32 lb.
15"	15.03"	17.70"	1.20"	2.60"	4.19 lb.
18"	18.29"	21.50"	1.46"	2.60"	6.53 lb.
24"	24.06"	27.87"	1.81"	1.23"	10.66 lb.
30"	29.64"	34.54"	2.45"	4.00"	14.43 lb.
36"	35.75"	40.53"	2.26"	4.70"	18.56 lb.
48"	48.03"	54.25"	2.82"	4.70"	30.89 lb.

ASTM F477	Standard Specification for Elastomeric Seals (Gaskets) for Joining Plastic Pipe
ASTM D3212	Standard Specification for Joints for Drain and Sewer Plastic Pipes Using Flexible Elastomeric Seals
ASTM D3350	Standard Specification for PE Plastics Pipe and Fittings Material
ASTM F667	Standard Specification for 3" through 24" Corrugated Polyethylene Pipe and Fittings
ASTM 2306	Standard Specification for 12" through 60" Corrugated Polyethylene Pipe and Fittings
AASHTO M252	Standard Specification for 3" through 10" Corrugated Polyethylene Pipe
AASHTO M294	Standard Specification for 12" through 60" Corrugated Polyethylene Pipe

NuFlo offers 4", 6", 8", 30", 36", and 48" dual wall pipes only in AASHTO; 10", 12", 15", 18" and 24" dual wall pipes are offered as either ASTM or AASHTO.